


# HS-350

4G GPS TRACKER (LTE /GSM/GNSS)

**HARES**  
Secure your world.

## KEY FEATURES

- 4G LTE Cat .1 with 2G FallBack
- 4200mAh Large Battery Capacity
- GNSS, LBS Location
- Disassemble Alarm Detection
- LED Light Hidden Design
- Strong Magnetic Adsorption



Container Tracking



Trailer Tracking



Luggage Tracking

## INTRODUCTION

Asset GPS tracker HS-350 is self-contained battery powered device and can be easily moved from vehicle to vehicle, Integrate a variety of sensors to realize position, motion and light monitoring, Placed in a package, or even used to monitor and track valuable assets. GPS tracker HS-350 is a professional tracking device for transport & logistics industry, refrigerated cargo industry, container tracking, construction, valuable assets and criminal investigation.



4G Network



Support OTA Upgrade



Disassemble Alarm Detection



4200mA Internal Battery



Strong Magnetic



Adjustable Positioning Time



Multiple Positioning Methods



Electronic Fence

**Golden Star Network Co.**

Website: [gsnco.om](http://gsnco.om)

Address: Way2114, building 704, near Oman oil petrol station, Madinat Qaboos, Muscat, Oman

# SPECIFICATIONS

## GENERAL

Network	4G Cat.1 + 2G GSM
Shell Material	ABS+PC
Power input	3V
Water & Dust Resistant Level	IPX5

## WIRELESS

Data Support	SMS, UDP
EU (Neoway N58-EA)	LTE-FDD: B1/B3/B5/B7/B8/B20/B28 LTE-TDD: B38/B40/B41 GSM: 900/1800 MHz
SA (Neoway N58-LA)	LTE-FDD: B1/B2/B3/B4/B5/B7/B8/B28/B66 LTE-TDD: B38/B40/B41 GSM: 850/900/1800 /1900MHz

## CONNECTOR


USB	1 Micro USB (configuration/debug)
GPS Antenna	Internal
LTE Antenna	Internal ( Bracket Antenna )
SIM Card	Micro SIM

## ON BOARD

LED	GNSS Network LED	LED
Memory	100 disques	

## SIZE AND WEIGHT

Dimensions	85x50x32mm
Weight	137g

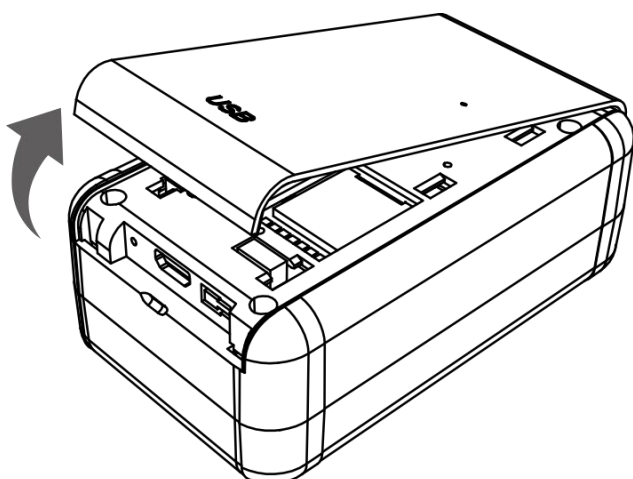

## POSITIONING

Location Technology	GPS/Glonass/Galileo/BeiDou
Chip Model	AT6558R
Positioning Antenna	Built-in antenna
Antenna Specifications	25x25x2mm
Concurrent GNSS	GPS+BDS (Default)
Update Rate	1 Hz
Channels	20
Tracking Sensitivity	-162dBm
Cold Start Open Sky	32 s
Hot Start Time	1 s
Assisted GPS	Supported

## ELECTRICAL

Power Average Consumption	10 uA( Sleep) 54 mA (Active)
Built-in Battery	4200mAh 3V(Not rechargeable)
Working Temperature	-20°C - 70°C
Storage Temperature	-35°C - 80°C
Working Humidity	10%-85% RH non-condensing

